


- 1 Raised floor panel
- 2 Plastic edge trim (optional)
- 3 Pedestal glue
- 4 Pedestal
- 5 Gasket

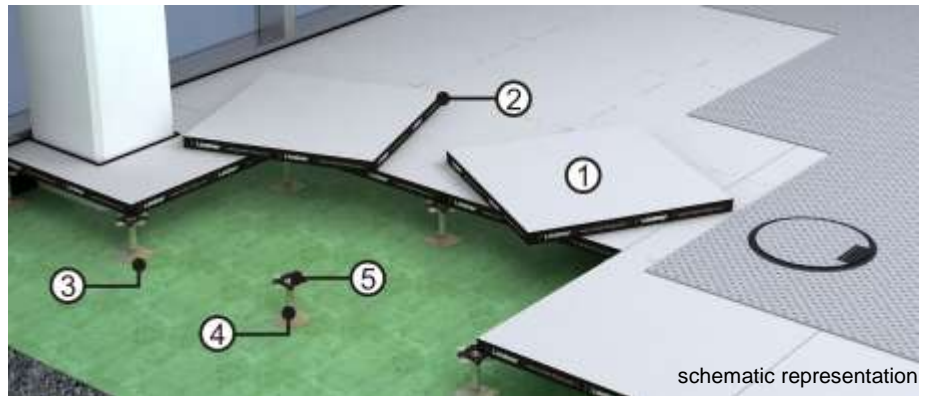

System description

- **Panel**
fibre-reinforced calciumsulphate panel, steel sheet at bottom, surrounding edge trim protection against damage and humidity, edges inclined, on request water repellent
- **Pedestal**
precisely height adjustable, from galvanized and yellow chromated steel, precision threaded bolt, various types according to height requirements
- **Gasket**
from plastic material, vaulted surface for perfect panel fixing
- **Height fixing**
Locking glue or mechanical fixing
- **Pedestal glue**
Placing of pedestal base into glue pad
- **Wall connection**
pre-stressed foam rubber, for acoustic insulation and absorption of horizontal movements
- **Subfloor**
a 2 - component epoxy coating is recommended with ventilation

Technical Data

Load and deflection class ¹	1A (2kN)
Reaction to fire performance ²	A2
Fire resistance performance ³	F 30
Electrostatic conductivity ⁴	$\geq 1 \times 10^6 \Omega$
Weight of system ⁵	44 kg/sqm
Pedestal heights ⁶	28 - 2000 mm
Thickness of panel	30,5 mm
Pedestal grid	600 x 600 mm

Acoustic values according ⁷	without covering	with covering
Normalized flanking level difference $D_{n,f,w}$	50 dB	51 dB (VM=27 dB)
Weighted sound reduction index R_w	62 dB	-
Reduction of impact sound pressure level ΔL_w	12 dB	26 dB (VM=27 dB)
Normalized flanking impact sound pressure level $L_{n,f,w}$	72 dB	51 dB (VM=27 dB)

Applications

- Computer rooms and control rooms
- Industry and working rooms
- Training and research rooms
- Office and construction areas

Possible floor coverings ⁸

- elastic coverings
- textile coverings
- loose-laid / free-laid covering tiles

- ¹ tested to DIN EN 12825 with safety factor 2, nominal load in brackets
- ² tested to DIN 4102, A1 (fully non-combustible) tested to EN 13501 on request
- ³ tested to DIN 4102, up to 800 mm floor heights, REI30 tested to EN 13501
- ⁴ Values depending on floor covering
- ⁵ floor height 150 mm (FFH), without covering
- ⁶ installation height, special heights on request
- ⁷ laboratory tested, VDI 3762 is to be considered
- ⁸ Panels without edge trim available after consultation of productmanagement